


ROLL FORM GROUP "XZ" SERIES SHEET PILING

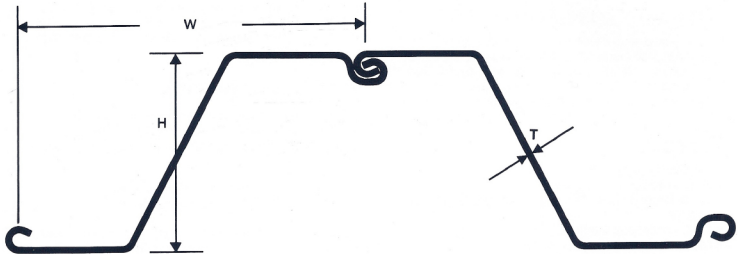

Physical Properties

NOTE: Metric values in brackets.

'XZ' series

Section	Thickness T In (mm)	Height H In (mm)	Nominal Width W In (mm)	Section Area In ² (cm ²)	Weight lbs/lin ft (kg/lin m)	Weight lbs/ft ² (kg/m ²)	Moment of Inertia In ⁴ /wall ft (cm ⁴ /wall m)	Radius of Gyration in (mm)	Section Modulus In ³ /wall ft (cm ³ /wall m)
XZ85	.335 (8.50)	14.06 (357)	25.0 (635)	13.6 (87.9)	46.4 (69.0)	22.3 (109)	212 (29000)	5.70 (145)	30.2 (1630)
XZ90	.354 (9.00)	14.09 (358)	25.0 (635)	14.4 (93.0)	48.9 (72.7)	23.5 (115)	225 (30800)	5.70 (145)	31.8 (1710)
XZ95	.375 (9.50)	14.12 (359)	25.0 (635)	15.2 (98.2)	51.7 (76.9)	24.8 (121)	237 (32400)	5.70 (145)	33.5 (1800)
XZ100	.394 (10.0)	14.15 (360)	25.0 (635)	15.9 (103.0)	54.2 (80.7)	26.0 (127)	250 (34200)	5.71 (145)	35.3 (1900)

T:602.381.1006

F:602.635.3105

E:peersh@alliancesteeltrading.com

www.alliancesteeltrading.com